



01C.61

ENGLISH

01C.61 EXTERNAL TEMPERATURE SENSOR

TECHNICAL DATA

Sensing range ($-20...+90$)°C

Resolution:


- 0.1°C ($-9.9...+90$)°C

- 1°C ($-10...-20$)°C

Maximum cable length 20 m

Degree of protection IP54

WIRING DIAGRAM

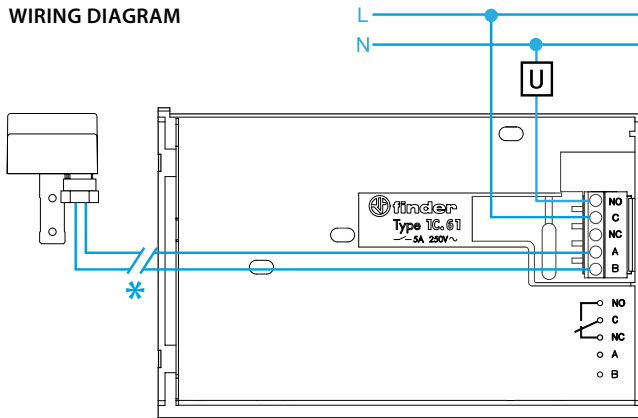

* Link terminals A and B of the sensor to terminals A and B of the chronothermostat (maximum cable length: 20 m)

NOTE

- For connection, use a shielded cable (eg alarm system cable)
- In the case where the sensor cable must pass in close proximity to other conductors particularly those at 230 V AC, use a shielded cable of group 3 with reinforced insulation
- Exercise caution and use a cable appropriate to the temperature being detected
- Connect the sensor, and the temperature will be displayed after 1 minute
- The sensor temperature is read every minute

PROGRAMMING

When used with the 1C.61 see the thermostat instruction manual, paragraph 9 of the Advanced Menu.